

Low Vacuum Suction Controllers

SPECIFICATION SHEET

MEC Low Suction Controllers are designed and built to the highest standards for any application where low vacuum is required.

Low vacuum is suitable for paediatric applications or where a vacuum not exceeding -20kPa (-150 mmHg) is required. The vacuum gauge is marked 0 to -27 kPa and 0 to -203 mmHg. NB: The suction control knob is yellow.

Features


- Controllers are supplied with BS probes
- Alternative probe types are available, including DIN and ULA probes
- Vacuum controllers are supplied with a gauge (marked in kPa and mmHg)
- Units with remote probes are supplied with 2 metres of vacuum hose
- Disposable hydrophobic filter that acts as a safety overflow valve
- Vacuum adjustment knob
- On/Off switch.



Suction Controller
on rail clamp with
remote BS Probe



Suction Controller
on Male 'V' Wedge
with Remote BS Probe

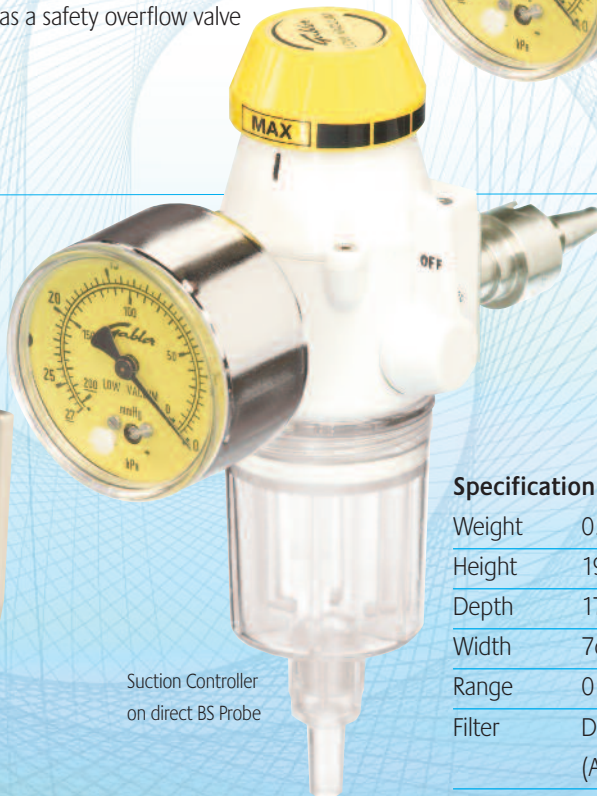

Suction Controller
on direct BS Probe

Specification

Weight	0.45Kg
Height	19cm
Depth	17cm
Width	7cm
Range	0 to -27kPa 0 to -203mmHg
Filter	Disposable hydrophobic filter (ASP 980)



Supplied by