

Thoracic Suction Controllers

SPECIFICATION SHEET

MEC Thoracic Suction Controllers are designed and built to the highest standards for any application where extra low vacuum is required.


Thoracic suction is suitable for abdominal or pleural drainage or where a vacuum not exceeding -7kPa (-53 mmHg) is required. The vacuum gauge is marked 0 to -10 kPa and 0 to -75 mmHg. NB: The suction control knob is blue.

Features

- Controllers are supplied with BS probes
- Alternative probe types are available, including DIN and ULA probes
- Vacuum controllers are supplied with a gauge (marked in kPa and mmHg)
- Units with remote probes are supplied with 2 metres of vacuum hose
- Disposable hydrophobic filter that acts as a safety overflow valve
- Vacuum adjustment knob
- On/Off switch.



Suction Controller on rail clamp with remote BS Probe

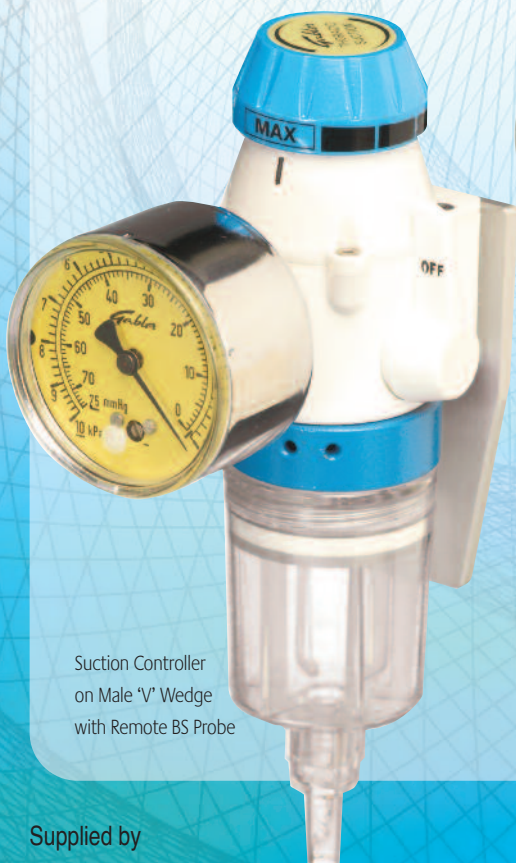

Suction Controller on Male 'V' Wedge with Remote BS Probe



Suction Controller on direct BS Probe

Specification

Weight	0.45Kg
Height	19cm
Depth	17cm
Width	7cm
Range	0 to -10kPa 0 to -75mmHg
Filter	Disposable hydrophobic filter (ASP 980)



Supplied by